

**DIMENSIONAL FLAGSTONE PALLET**

- All sizes on every pallet
- Consistent 2" thickness
- One layer = one pattern
- 8 layers per pallet
- Pallet weight = ± 2,350 lbs (incl. pallet weight)
- Coverage = 98 sqft/Pallet
- Section = 12.25 sqft per layer

*\*Not suitable for vehicular applications*




**24x24 FLAGSTONE**



- Same size 24"x24" pieces
- Consistent 2" thickness
- Pallet weight ± 1600 lbs (incl. pallet weight)
- Coverage = 64 sqft/pallet
- Units per bundle = 16
- Weight per stone = 96 lbs


*\*Not suitable for vehicular applications*

**24x24 FLAGSTONE CROSS-SECTION (on-grade installation)**

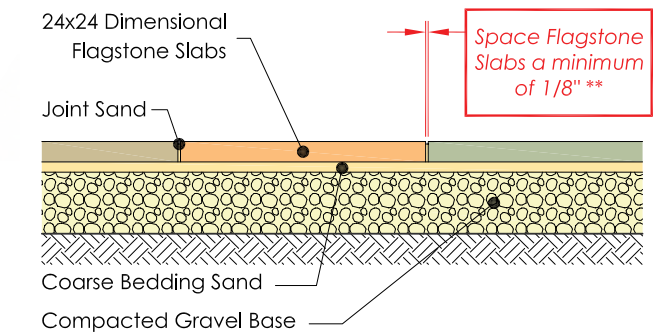


**\*\* 24x24 Flagstone slabs must be spaced apart a minimum of 1/8".** These slabs were originally developed for use with roof-top pedestal mount systems. On-grade installations require manually spacing the slabs apart. This can be achieved using a pair of 1/8" wooden shims or by using removable tile spacers. Failure to provide a relief joint will restrict the seasonal flexibility of the patio.


**DIMENSIONAL FLAGSTONE CROSS-SECTION**

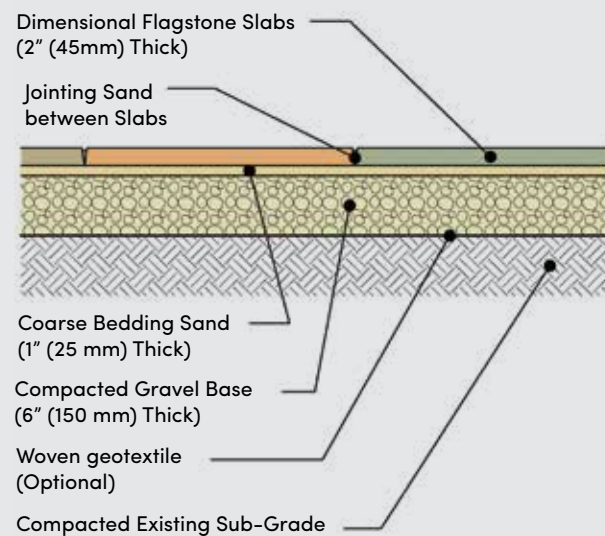

**WALKWAY LAYOUT**

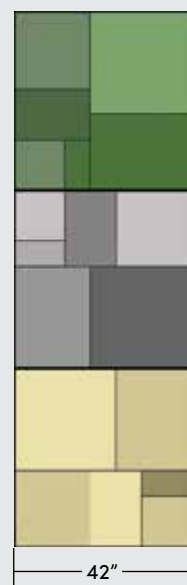

**PATIO LAYOUT**

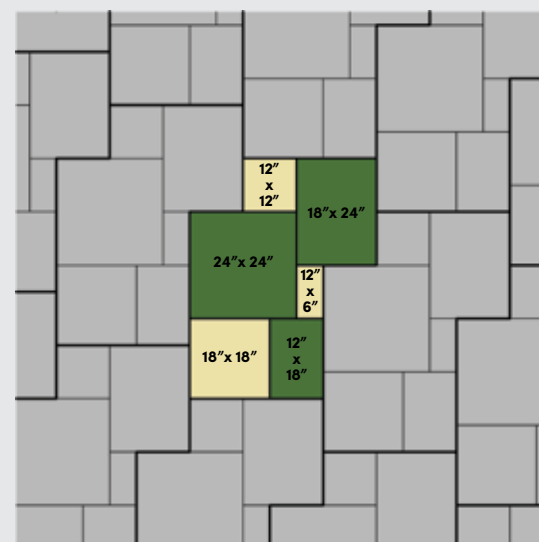

**LINEAR FLAGSTONE**



- Same size 21"x 10.5" pieces
- Consistent 2" thickness
- Pallet weight ± 2350 lbs (incl. pallet weight)
- Coverage = 98 sqft/pallet
- Units per bundle = 64
- Weight per stone = 37 lbs

*\*Not suitable for vehicular applications*